

Емкостные системы измерения уровня наполнения KFI

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ret@nt-rt.ru || сайт: <https://rechner.nt-rt.ru>



i-LEVEL Capacitive Filling Level Probe - KFI

Analogue current output 4...20 mA

2 programmable limit value switching points

- Integrated evaluation electronics
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Multifunction probe: Automatic identification of NPN- / PNP function
- Normally open / normally closed function switchable
- Electronic lock





Technical data

Active zone [mm]	415 mm
Electrical version	5 - pin DC
Output function	Analogue, 2 limit value switching points, Normally open / normally closed switchable
Type	KFI-12-500-415-GFK/VA0-D16-G1-IL4-ETF-Y10
Art.-No.	KI 0139
Operating voltage (U_B)	18...30 V DC
Permitted residual max.	5 %
Load resistance (R_L)	$\leq 400 \text{ Ohm}$
Output current	100 mA
Power consumption (outputs no-load)	0,8 W
Analogue output	4...20 mA
Switching frequency max.	1 Hz
Permitted ambient temperature	-25...+55 °C
Permitted ambient temperature (for active zone)	-25...+100 °C
Pressure	10 bar
LED-Display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305 / AISI 303 / polyester
Active zone	GFK

For matching connectors please see our selection of accessories.

*Where applicable

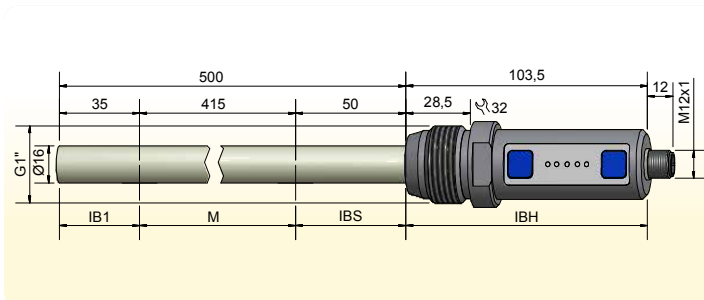

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

Analogue current output 4...20 mA

2 programmable limit value switching points

- Integrated evaluation electronics
- Housing material: PTFE, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Multifunction probe: Automatic identification of NPN- / PNP function
- Normally open / normally closed function switchable
- Electronic lock





Technical data

Active zone [mm]	415 mm
Electrical version	5 - pin DC
Output function	Analogue, 2 limit value switching points, Normally open / normally closed switchable
Type	KFI-12-500-415-PTFE/VAb-D16-G1-IL4-ETF-Y10
Art.-No.	KI 0140
Operating voltage (U_B)	18...30 V DC
Permitted residual max.	5 %
Load resistance (R_L)	$\leq 400 \text{ Ohm}$
Output current	100 mA
Power consumption (outputs no-load)	0,8 W
Analogue output	4...20 mA
Switching frequency max.	1 Hz
Permitted ambient temperature	-25...+55 °C
Permitted ambient temperature (for active zone)	-25...+100 °C
Pressure	1 bar
LED-Display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305 / AISI 303 / polyester
Active zone	PTFE (FDA 21 CFR 177.1550)

For matching connectors please see our selection of accessories.

*Where applicable

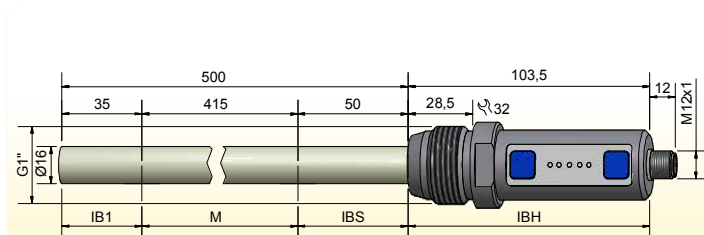

Other housing materials for the active zone (probe), like PE, GFK, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

Analogue voltage output 0...10 V

2 programmable limit value switching points

- Integrated evaluation electronics
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Multifunction probe: Automatic identification of NPN- / PNP function
- Normally open / normally closed function switchable
- Electronic lock





Technical data

Active zone [mm]	415 mm
Electrical version	5 - pin DC
Output function	Analogue, 2 limit value switching points, Normally open / normally closed switchable
Type	KFI-12-500-415-GFK/VAb-D16-G1-UL0-ETF-Y10
Art.-No.	KI 0141
Operating voltage (U_B)	18...30 V DC
Permitted residual max.	5 %
Load resistance (R_L)	≥ 2 K Ohm
Output current	100 mA
Power consumption (outputs no-load)	0,8 W
Analogue output	0...10 V
Switching frequency max.	1 Hz
Permitted ambient temperature	-25...+55 °C
Permitted ambient temperature (for active zone)	-25...+100 °C
Pressure	10 bar
LED-Display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305 / AISI 303 / polyester
Active zone	GFK

For matching connectors please see our selection of accessories.

*Where applicable

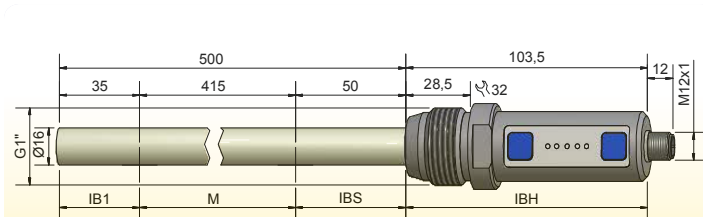

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

Analogue voltage output 0...10 V

2 programmable limit value switching points

- Integrated evaluation electronics
- Housing material: PTFE, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Multifunction probe: Automatic identification of NPN- / PNP function
- Normally open / normally closed function switchable
- Electronic lock





Technical data

Active zone [mm]	415 mm
Electrical version	5 - pin DC
Output function	Analogue, 2 limit value switching points, Normally open / normally closed switchable
Typ	KFI-12-500-415-PTFE/VAab-D16-G1-UL0-ETF-Y10
Art.-Nr.	KI 0142
Operating voltage (U_B)	18...30 V DC
Permitted residual max.	5 %
Load resistance (R_L)	≥ 2 K Ohm
Output current	100 mA
Power consumption (outputs no-load)	0,8 W
Analogue output	0...10 V
Switching frequency max.	1 Hz
Permitted ambient temperature	-25...+55 °C
Permitted ambient temperature (for active zone)	-25...+100 °C
Pressure	1 bar
LED-Display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305 / AISI 303 / polyester
Active zone	PTFE (FDA 21 CFR 177.1550)

For matching connectors please see our selection of accessories.

*Where applicable

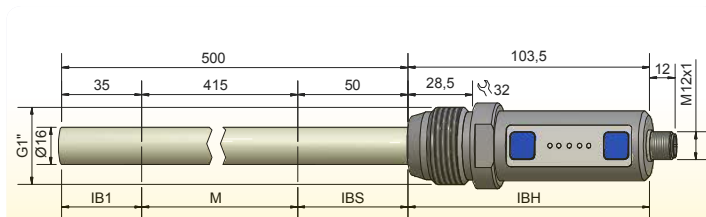

Other housing materials for the active zone (probe), like PE, GFK, PVDF or PEEK on request.



■L&VEL Capacitive Filling Level Probe - KFI

Analogue current output 4...20 mA

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Probe length max. 2000 mm
- With flange connector M 12 x 1 (5-pin Teach function included)



Technical data



Active zones [M]	443 mm
Electrical version	4 - pin DC
Output function	Analogue
Type	KFI-1-500-443-GFK/VAb-D16-G1-IL4-ETW-Y10
Art.-No.	KI 0058
Operating voltage (U_B)	15...30 V DC
Permitted residual ripple max.	5 %
Load resistance (R_L)	$\leq 200 \Omega$
Power consumption (outputs no-load)	0,9 W
Analogue output	4...20 mA
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305 / AISI 303
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)
For matching connectors please see our selection of accessories.	

*Where applicable

EasyTeach chart:

LED green / Adjustment function

- Adjustment Min.
- Adjustment Max.
- Factory set
- Test

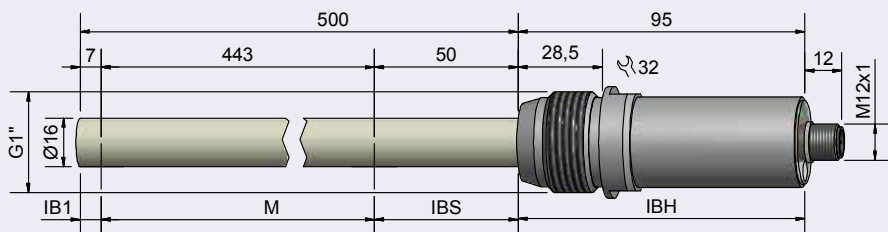

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



L&VEL Capacitive Filling Level Probe - KFI Analogue current output 4...20 mA

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- With flange connector M 12 x 1 (5-pin Teach function included)





Technical data

Active zones [M]	443 mm
Electrical version	4 - pin DC
Output function	Analogue
Type	KFI-1-500-443-PTFE/VAb-D16-G1-IL4-ETW-Y10
Art.-No.	KI 0075
Operating voltage (U_b)	15...30 V DC
Permitted residual ripple max.	5 %
Load resistance (R_L)	$\leq 200 \Omega$
Power consumption (outputs no-load)	0,9 W
Analogue output	4...20 mA
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (5-pin)
Housing material	VA No. 1.4305 / AISI 303
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)
For matching connectors please see our selection of accessories.	

*Where applicable

EasyTeach chart:

- LED green / Adjustment function
- Adjustment Min.
 - Adjustment Max.
 - Factory set
 - Test

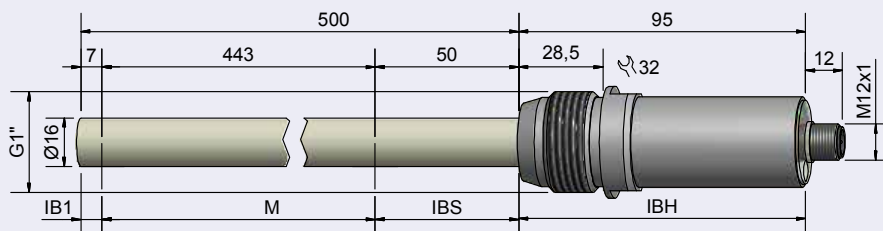

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



L&VEL Capacitive Filling Level Probe - KFI **Analogue current output 4...20 mA**

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm



Technical data

Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	Analogue
Type	KFI-1-500-370-GFK-D16-IL4-ETW-Z02
Art.-No.	KI 0023
Operating voltage (U _B)	15...30 V DC
Permitted residual ripple max.	5 %
Load resistance (R _L)	≤ 200 Ω
Power consumption (outputs no-load)	0,9 W
Analogue output	4...20 mA
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm²
Housing material	GFK
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)



Accessories for mounting (not delivered with the probe) please see our selection of accessories.

*Where applicable

EasyTeach chart:

LED green / Adjustment function

- Adjustment Min.
- Adjustment Max.
- Factory set
- Test

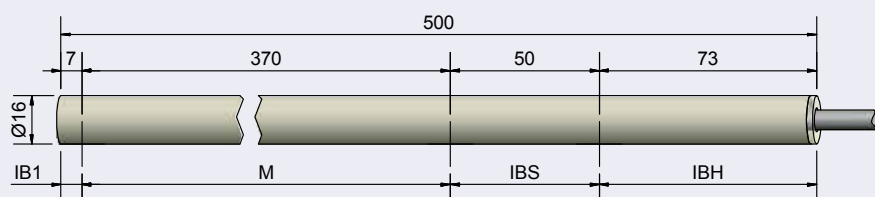

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



L&VEL Capacitive Filling Level Probe - KFI **Analogue current output 4...20 mA**

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm



Technical data



Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	Analogue
Type	KFI-1-500-370-PTFE-D16-IL4-ETW-Z02
Art.-No.	KI 0074
Operating voltage (U_B)	15...30 V DC
Permitted residual ripple max.	5 %
Load resistance (R_L)	$\leq 200 \Omega$
Power consumption (outputs no-load)	0,9 W
Analogue output	4...20 mA
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm ²
Housing material	PTFE (FDA 21 CFR 177.1550)
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)

Accessories for mounting (not delivered with the probe) please see our selection of accessories.

*Where applicable

EasyTeach chart:

- LED green / Adjustment function
- Adjustment Min.
 - Adjustment Max.
 - Factory set
 - Test

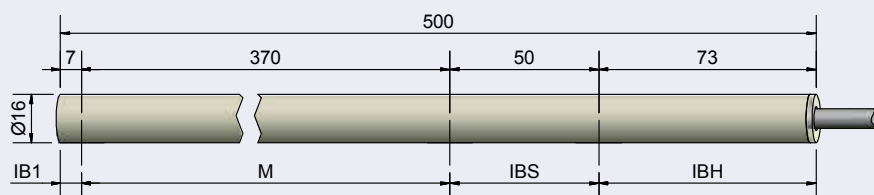

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



L&V&L Capacitive Filling Level Probe - KFI **1 Limit value switching point**

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Automatic identification of NPN / PNP function
- With flange connector M 12 x 1 (5-pin Teach function included)







Technical data

Active zones [M]	443 mm
Electrical version	4 - pin DC
Output function	1 limit value switching point, normally open
Type	KFI-51-500-443-GFK/VAb-D16-G1-S-ETW-Y10
Art.-No.	KI 0059
Operating voltage (U _B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (5-pin)
Housing material	VA No. 1.4305 / AISI 303
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)

For matching connectors please see our selection of accessories.

*Where applicable

EasyTeach chart:
LED green / Adjustment function

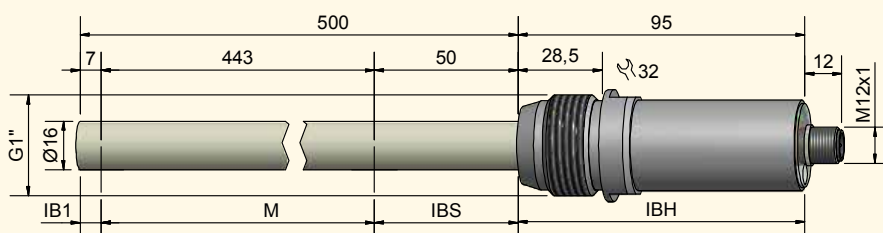

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

1 Limit value switching point

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Automatic identification of NPN / PNP function
- With flange connector M 12 x 1 (5-pin Teach function included)







Technical data

Active zones [M]	443 mm
Electrical version	4 - pin DC
Output function	1 limit value switching point, normally open
Type	KFI-51-500-443-PTFE/VAb-D16-G1-S-ETW-Y10
Art.-No.	KI 0076
Operating voltage (U _B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (5-pin)
Housing material	VA No. 1.4305 / AISI 303
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)
For matching connectors please see our selection of accessories.	

*Where applicable

EasyTeach chart:
LED green / Adjustment function

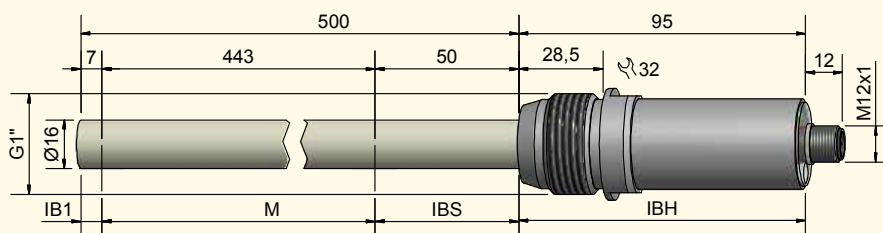

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

1 Limit value switching point

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Automatic identification of NPN / PNP function



Technical data

Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	1 limit value switching point, normally open
Type	KFI-51-500-370-GFK-D16-S-ETW-Z02
Art.-No.	KI 0021
Operating voltage (U _B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm ²
Housing material	GFK
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)




Accessories for mounting (not delivered with the probe) please see our selection of accessories.

*Where applicable

EasyTeach chart:

LED green / Adjustment function

- Adjustment
- Factory set
- Test

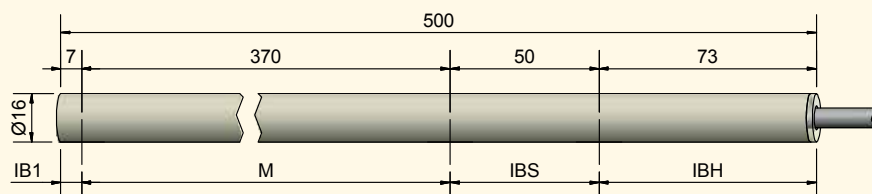

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

1 Limit value switching point

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm
- Automatic identification of NPN / PNP function



Technical data





Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	1 limit value switching point, normally open
Type	KFI-51-500-370-PTFE-D16-S-ETW-Z02
Art.-No.	KI 0072
Operating voltage (U_B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm ²
Housing material	PTFE (FDA 21 CFR 177.1550)
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)

Accessories for mounting (not delivered with the probe) please see our selection of accessories.

*Where applicable

EasyTeach chart:

LED green / Adjustment function

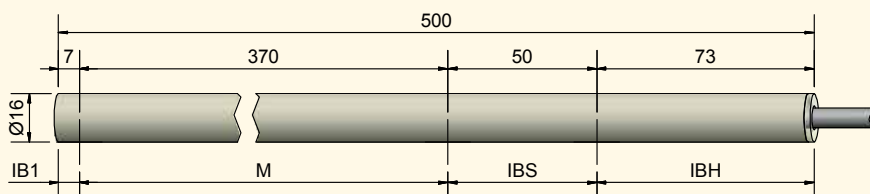

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Automatic identification of NPN / PNP function
- With flange connector M 12 x 1 (5-pin Teach function included)



Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



i-LEVEL Capacitive Filling Level Probe - KFI

2 Limit value switching points

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Automatic identification of NPN / PNP function
- With flange connector M 12 x 1 (5-pin Teach function included)



Technical data




Active zones [M]	443 mm
Electrical version	4 - pin DC
Output function	2 limit value switching points, normally open
Type	KFI-52-500-443-PTFE/VAb-D16-G1-S-ETW-Y10
Art.-No.	KI 0078
Operating voltage (U_B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (5-pin)
Housing material	VA No. 1.4305 / AISI 303
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
For matching connectors please see our selection of accessories.	

*Where applicable

EasyTeach chart:

LED green / Adjustment function

- Adjustment S1
- Adjustment S2
- Factory set
- Test

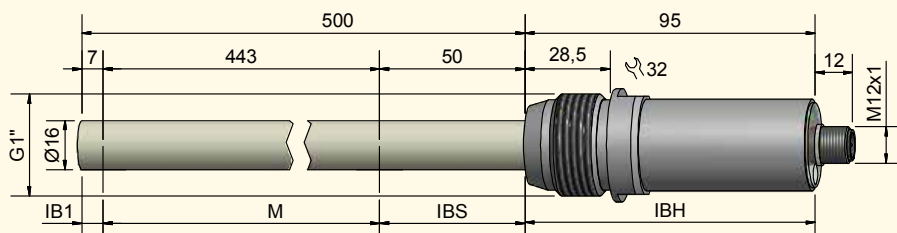



Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.



- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Automatic identification of NPN / PNP function



*Where applicable





i-LEVEL Capacitive Filling Level Probe - KFI

2 Limit value switching points

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: PTFE, Ø 16 mm
- Automatic identification of NPN / PNP function



Technical data

Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	2 limit value switching points, normally open
Type	KFI-52-500-370-PTFE-D16-S-ETW-Z02
Art.-No.	KI 0073
Operating voltage (U_B)	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm²
Housing material	PTFE (FDA 21 CFR 177.1550)
Active zone	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)




Accessories for mounting (not delivered with the probe) please see our selection of accessories.

*Where applicable

EasyTeach chart:

LED green / Adjustment function

- Adjustment S1
- Adjustment S2
- Factory set
- Test

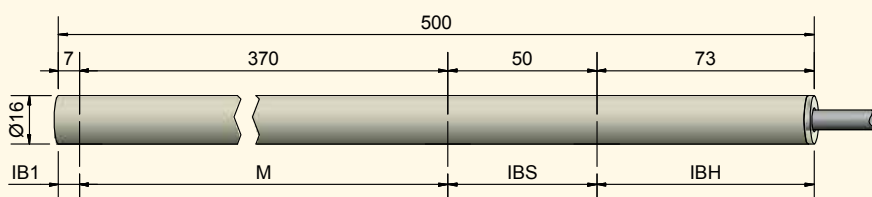

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ret@nt-rt.ru || сайт: <https://rechner.nt-rt.ru>