

Емкостные датчики NormLine KAS-M32

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59




Киргизия +996(312)96-26-47

эл.почта: ret@nt-rt.ru || сайт: <https://rechner.nt-rt.ru>

CAPACITIVE SENSORS *NormLine*

Housing	M 32 x 1.5		M 32 x 1.5	
CE  	Non-flush mountable		Non-flush mountable	
	20 mm		20 mm	
Sensing distance S_n , [mm]	20 mm		20 mm	
Sensing distance min. / max. [mm] adjustable	2...30 mm		2...30 mm	
	Type code	Art. No.	Type code	Art. No.
Type NPN antivalent (NO / NC)	KAS-70-35-A-M32-PPO-Z02-1-NL	KA 0727	KAS-70-35-A-M32-PTFE/MS-Y3-1-NL	KA 0722
Type NPN normally open (NO)	KAS-70-35-S-M32-PPO-Z02-1-NL	KA 0452		
Type PNP antivalent (NO / NC)	KAS-80-35-A-M32-PPO-Z02-1-NL	KA 0440	KAS-80-35-A-M32-PTFE/MS-Y3-1-NL	KA 0721
Type PNP normally open (NO)	KAS-80-35-S-M32-PPO-Z02-1-NL	KA 0726		
Type AC / DC normally open (NO)				
Type AC / DC normally closed (NC)				
Certificates	CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
Operating voltage (U_B)	12...30 V DC		12...30 V DC	
Output current (I_o)	200 mA / 2 x 200 mA		2 x 200 mA	
No load current (I_o)	< 15 mA		< 15 mA	
Load current min.	-		-	
Frequency of operating cycles max.	50 Hz		50 Hz	
Permitted ambient temperature	-25...+70 °C		-25...+70 °C	
LED display	Yes		Yes	
Protective circuit	Yes		Yes	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67*		IP 67*	
Connection	2 m cable, PVC, 3 x 0.75 mm ² 4 x 0.5 mm ² for antivalent		Flange connector M 12 x 1	
Housing material	PA / PPO		Brass	
Active surface	PA / PPO		PTFE (FDA 21 CFR 177.1550)	
Lid	PA / PPO		PA / PPO	

*With sealed potentiometer screw

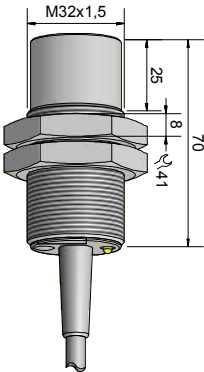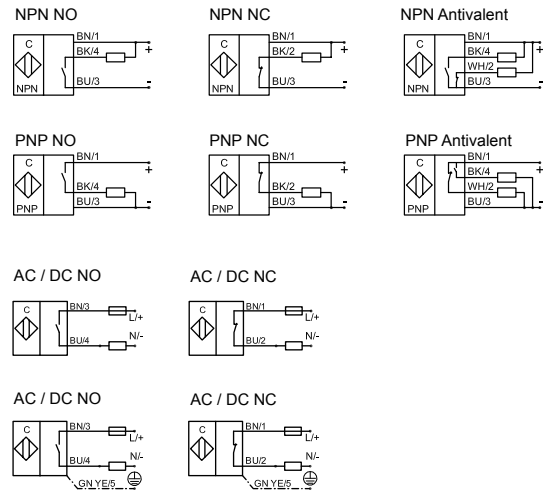

Dimension M 32 x 1.5

M 32 x 1.5






M 32 x 1.5



M 32 x 1.5



Non-flush mountable		Non-flush mountable		Non-flush mountable	
20 mm		20 mm		20 mm	
2...30 mm		2...30 mm		3...25 mm	
Type code	Art. No.	Type code	Art. No.	Type code	Art. No.
KAS-80-35-A-M32-PPO-Y3-1-NL	KA 0417	KAS-80-35-A-M32-Y3-3D-NL	KA 0429		
				KAS-90-35-S-M32-PPO-Z02-1-NL	KA 0629
CE, RoHS, UL-CSA		CE, RoHS, UL-CSA, ATEX		CE, RoHS, UL-CSA	
12...30 V DC		12...30 V DC		20...250 V AC / DC	
2 x 200 mA		2 x 200 mA		330 mA (ETL = 250 mA)	
< 15 mA		< 15 mA		< 2.5 mA	
		-		5 mA	
50 Hz		50 Hz		25 Hz	
-25...+70 °C		-25...+70 °C		-25...+70 °C (ETL = +60 °C)	
Yes		Yes		Yes	
Yes		Yes		Yes	
IEC 60947-5-2		IEC 60947-5-2		IEC 60947-5-2	
IP 67*		IP 67*		IP 67*	
Flange connector M 12 x 1		Flange connector M 12 x 1		2 m cable, PVC, 2 x 0.75 mm ²	
PA / PPO		PA / PPO		PA / PPO	
PA / PPO		PA / PPO		PA / PPO	
PA / PPO		PA / PPO		PA / PPO	

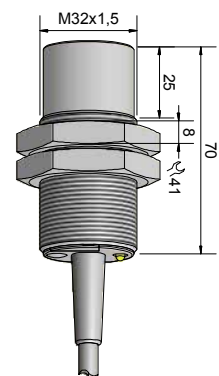



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47